


# H PRODUCT UPDATE

## TIREMAAX®


LIT NO: P56059

DATE: November 2020

Hendrickson Trailer Commercial Vehicle Systems announces a new thermoplastic tire hose option for TIREMAAX®. The new tire hoses feature an integral check port fitting with flow-through cap that allows tire pressure to be checked at the port without removing the hose from the hubcap. The hoses are designed for use with 22.5", dual and super single tires. Notice that the yellow "Check Tire Pressure Here" label has been eliminated from the new hoses. The new integral check port tire hose option will be available beginning mid-December 2020.

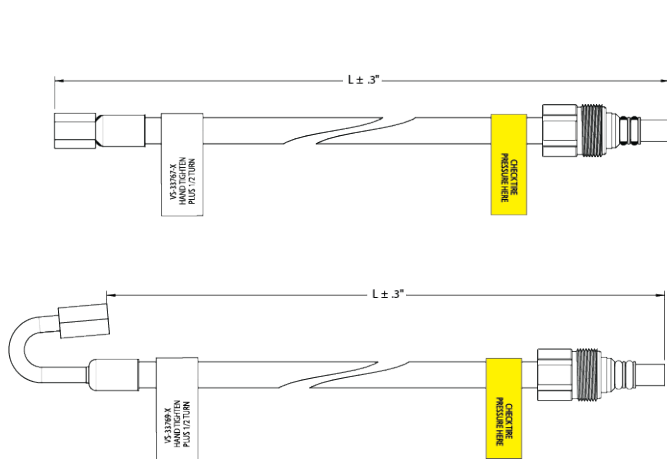

**Standard Hoses**

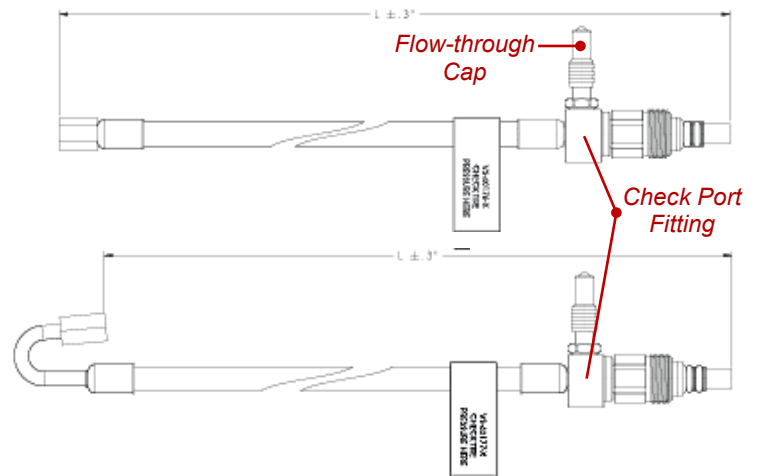

**Integral Check Port Hoses**

When specifying the new tire hose with integral check port as part of a TIREMAAX kit, mark the appropriate selection on the *L868 Rev Q TIREMAAX Ordering Guide* or the *TIREMAAX* section of the applicable suspension/axle ordering guide. Choosing the integral check port option will result in a unique TIREMAAX kit part number (TIREMAAX.###). The revised ordering guides will be available on the website, [www.hendrickson-intl.com](http://www.hendrickson-intl.com), beginning November 30<sup>th</sup>.

<b>CONTROLLER TYPE:</b>	<input type="checkbox"/> CP	<input type="checkbox"/> PRO	
<b>ELECTRICAL CONNECTION:</b>	<input type="checkbox"/> Delphi Weather Pack (Standard)	<input type="checkbox"/> Blade Terminals <sup>18</sup>	
<b>HUBCAP TYPE:</b>	<input type="checkbox"/> Hendrickson Bolt-On	<input type="checkbox"/> Hendrickson Extended Bolt-On <sup>19</sup>	
<b>LUBE TYPE:</b>	<input type="checkbox"/> Semi-Fluid Grease	<input type="checkbox"/> Oil	
<b>WHEEL STYLE / MATERIAL</b>	<input type="checkbox"/> Dual / Aluminum	<input type="checkbox"/> Dual / Steel or Combo	<input type="checkbox"/> Super Single / Aluminum (straight hose)
	<input type="checkbox"/> Super Single / Steel (outboard valve stem; 180-degree hose)		<input type="checkbox"/> Super Single / Steel (inboard valve stem; straight hose)
<b>TIRE SIZE:</b>	<input type="checkbox"/> 17.5" <input type="checkbox"/> 19.5" <input type="checkbox"/> 22.5" <input type="checkbox"/> 24.5"		
<b>COLD TIRE PRESSURE SETTING (psi)<sup>20</sup>:</b>	<input type="checkbox"/> 70 <input type="checkbox"/> 75 <input type="checkbox"/> 80 <input type="checkbox"/> 85 <input type="checkbox"/> 90 <input type="checkbox"/> 95 <input type="checkbox"/> 100 <input type="checkbox"/> 105 <input type="checkbox"/> 110 <input type="checkbox"/> 115 <input type="checkbox"/> 120		
<b>TIRE HOSE:</b>	<input type="checkbox"/> Standard	<input checked="" type="checkbox"/> Integral Check Port (22.5" tire size only)	
<b>TRAILER-MOUNTED INDICATOR LIGHT KIT:</b>	<input type="checkbox"/> LED – 12V with 65-foot Cable (Standard)	<input type="checkbox"/> LED – 12V with 35-foot Cable	<input type="checkbox"/> LED – 24V (Export <sup>21</sup> )
	<input type="checkbox"/> Incandescent – 12V	<input type="checkbox"/> No <sup>18</sup>	
<b>WIRING HARNESS:</b>	<input type="checkbox"/> Premium, 15-Foot, ABS-ready	<input type="checkbox"/> Premium, 3-Foot, ABS-ready	
	<input type="checkbox"/> Standard, 18-inch, Wiring Adaptor Plug	<input type="checkbox"/> No <sup>18</sup>	
<b>AIR PLUMBING KIT:</b>	<input type="checkbox"/> Manifold <sup>22</sup>	<input type="checkbox"/> No	
<b>CONTROLLER TANK VALVE<sup>23</sup>:</b> (Pressure Check)	<input type="checkbox"/> Yes (CP Models Only)	<input type="checkbox"/> No	

New part numbers have also been established for customers buying tire hose kits in lieu of TIREMAAX kits, and for those with aftermarket tire hose requirements (see charts below). The new hoses are backwards compatible and may be used to replace current tire hoses in 22.5" tire applications. Refer to L878 Rev Q TIREMAAX Parts List for complete details.

TIRE HOSE KITS						
HOSE STYLE	WHEEL STYLE	TIRE SIZE	WHEEL MATERIAL	QTY. PER TANDEM	TIRE HOSE KIT PART NUMBER	NOTE
Integral Check Port	Dual	22.5"	Aluminum	2	VS-8404TM	(2) VS-40176-2 and (2) VS-40177-1
			Steel or Combo	2	VS-8405TM	(2) VS-40176-3 and (2) VS-40177-1
	Super Single	22.5"	Aluminum	2	VS-8407TM	(2) VS-40176-1
			Steel (Inboard Stem)	2	VS-8407TM	(2) VS-40176-1
			Steel (Outboard Stem)	2	VS-8408TM	(2) VS-40177-1

AFTERMARKET TIRE HOSES							
HOSE STYLE	WHEEL STYLE	TIRE SIZE	WHEEL MATERIAL	POSITION	FITTING	QTY. PER TANDEM	TIRE HOSE PART NUMBER
Integral Check Port	Dual	22.5"	Aluminum	Inner	Straight	4	VS-40176-2
				Outer	180-Degree	4	VS-40177-1
			Steel or Combo	Inner	Straight	4	VS-40176-3
				Outer	180-Degree	4	VS-40177-1
	Super Single	22.5"	Aluminum	N/A	Straight	4	VS-40176-1
			Steel	Inboard Stem	Straight	4	VS-40176-1
Outboard Stem	180-Degree	4		VS-40177-1			

As always, Hendrickson is committed to providing world-class products and exceptional customer service. Please contact your Hendrickson sales representative or call 1-866-RIDEAIR (743-3247) to speak with customer service regarding the change.

*Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.*

*All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration. Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.*

**Call Hendrickson at 330.489.0045 or 866.RIDEAIR (743.3247) for additional information.**



www.hendrickson-intl.com

**TRAILER COMMERCIAL VEHICLE SYSTEMS**

2070 Industrial Place SE  
Canton, OH 44707-2641 USA  
866.RIDEAIR (743.3247)  
330.489.0045 • Fax 800.696.4416

**Hendrickson Canada**

250 Chrysler Drive, Unit #3  
Brampton, ON Canada L6S 6B6  
800.668.5360  
905.789.1030 • Fax 905.789.1033

**Hendrickson Mexicana**

Circuito El Marqués Sur #29  
Parque Industrial El Marqués  
Pob. El Colorado, Municipio El Marqués,  
Querétaro, México C.P. 76246  
+52 (442) 296.3600 • Fax +52 (442) 296.3601