

# HT™ SERIES


## HT250U-Y SPECIFICATIONS

LIT NO: L34

DATE: January 2013

REVISION: C

---

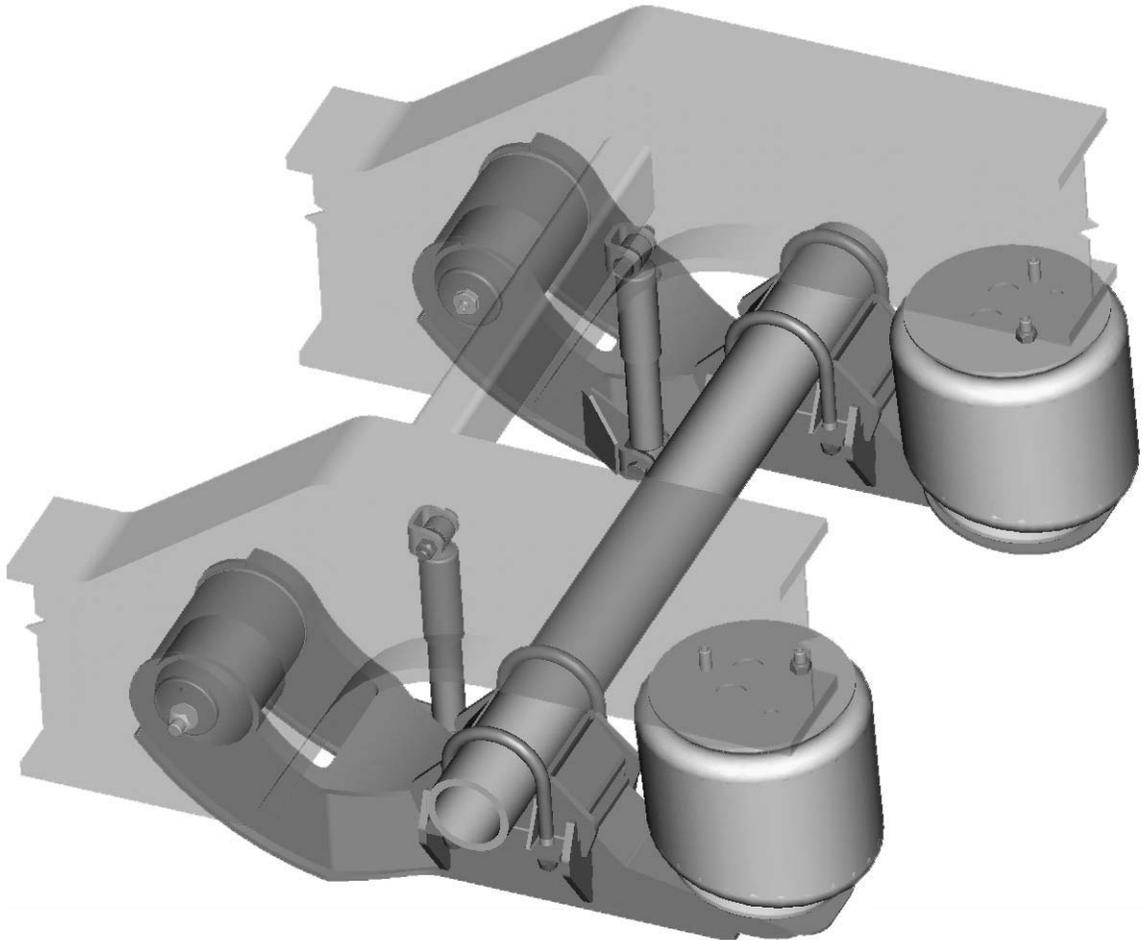



**APPLICATIONS**

<b>CAPACITY:</b>	25,000 lbs. (11,300 kg)	
<b>TRAILER TYPES:</b>	<b>UNITED STATES AND CANADA</b> Lowboy / Drop Deck Specialty Trailers	<b>MEXICO, CENTRAL AND SOUTH AMERICA</b> None
<b>AXLE DATA:</b>	5-inch diameter round, 5/8-inch wall, S-cam, with or without auto slack adjusters for 15-, 20- or 22-inch wheels	
<b>AXLE ARRANGEMENT:</b>	Single; tandem: 122-inch maximum axle spacing Tri or quad: 144-inch maximum total spacing	
<b>FRAME TYPES:</b>	Steel; 96-inch or 102-inch wide trailers	

**MODEL CHART**

SUSPENSION MODEL NUMBER	RIDE HEIGHT (inches)	JOUNCE (inches)	REBOUND (inches)	WEIGHT (pounds) <sup>1</sup>
HT250U-6.5Y-006	6.5	3.8	4.2	463
HT250U-9Y-006	9	5.2	4.2	463
HT250YB-6.5-006	6.5	3.7	4.2	459
HT250YB-7.5-006	7.5	4.3	4.2	459
HT250YB-9-006	9	5.1	4.2	459

<sup>1</sup>Weights shown are for the standard model (standard shock and air spring) and do not include the axle.

HT250U-Y models feature welded collar pivot connection.

HT250YB models feature QUIK-ALIGN® pivot connection.

Options available: high damp shocks, shock limit straps, rotated air spring and high pressure air spring.

**SUSPENSION APPLICATION NOTE:**

Care must be taken to insure that any additional suspensions used on the same vehicle are compatible with the Y-beam suspension. For assistance, please contact your Hendrickson Trailer Suspension Systems customer service representative.

[www.hendrickson-intl.com](http://www.hendrickson-intl.com)



Hendrickson Canada  
250 Chrysler Drive, Unit #3  
Brampton, ON Canada L6S 6B6  
905.789.1030  
Fax 905.789.1033

Trailer Commercial Vehicle Systems  
2070 Industrial Place SE  
Canton, OH 44707-2641 USA

866.RIDEAIR (743.3247)  
330.489.0045  
Fax 800.696.4416

Hendrickson Mexicana  
Circuito El Marqués Sur #29  
Parque Industrial El Marqués  
Pob. El Colorado, Municipio El Marqués,  
Querétaro, México C.P. 76246  
+52 (442) 296.3600  
Fax: +52 (442) 296.3601