

Increase payload with HAULMAAX® on International® Trucks




Hendrickson's HAULMAAX® is a premium heavy-duty rear rubber suspension featuring a weight-efficient, durable design. Suspension weight is reduced for greater payloads through higher strength materials and advanced manufacturing methods. The unique spring system adjusts to the load, delivering the preferred combination of empty ride quality and loaded stability for demanding vocational applications. In addition, HAULMAAX provides outstanding traction and mobility while helping reduce maintenance for lower life cycle costs.



To learn more about HAULMAAX,
call 855.743.3733 or visit
www.hendrickson-intl.com

HAULMAAX® for International® Trucks

- MAAXimize Payload**
- MAAXimize Traction**
- MAAXimize Stability**
- MAAXimize Driver Comfort**

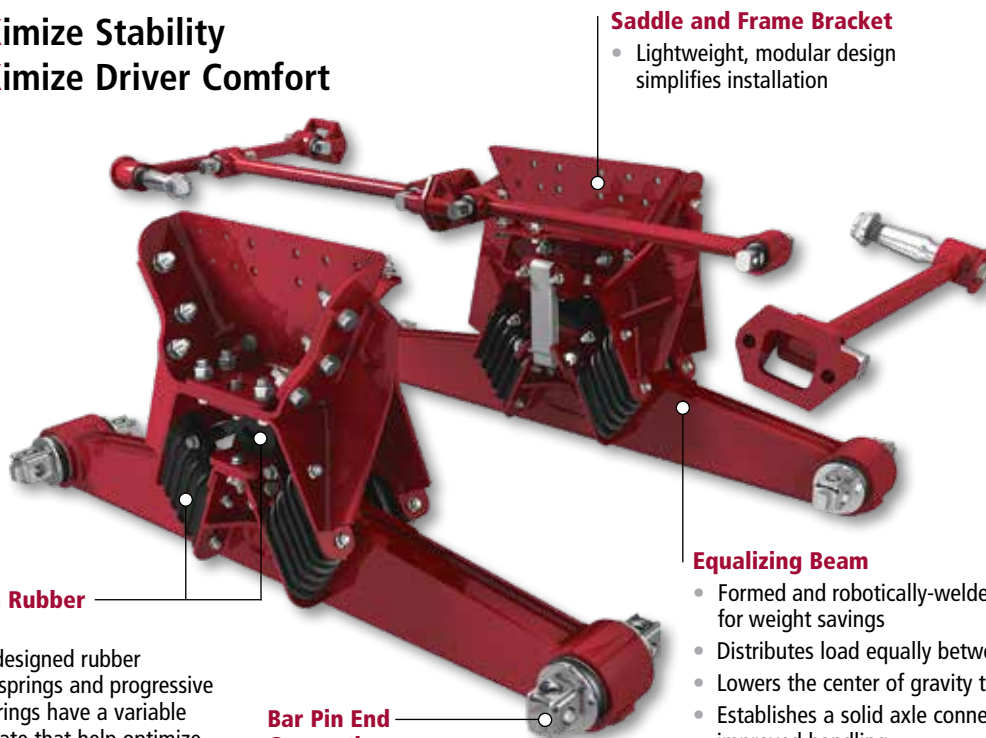

Saddle and Frame Bracket

- Lightweight, modular design simplifies installation

Premium Rubber Springs

- Newly designed rubber bolster springs and progressive load springs have a variable spring rate that help optimize empty ride with loaded stability

Bar Pin End Connection

- Rugged axle connection extends bushing life and allows easy axle alignment and serviceability

Equalizing Beam

- Formed and robotically-welded beam provides a narrow profile for weight savings
- Distributes load equally between both axles for improved traction
- Lowers the center of gravity to increase stability
- Establishes a solid axle connection for improved handling
- Center bushing eliminated for reduced maintenance

Shock Absorbers

- Provide additional driver comfort
- Required for tractor and logging applications
- Optional for other approved applications



HAULMAAX Feature Codes

International Model	Feature Code	HAULMAAX Capacity	Axle Spacing
WorkStar® / HV	14UMB	40,000 lbs.	N/A
WorkStar / HV / HX	14ULX	40,000 lbs.	55 in.
DuraStar / WorkStar / MV / HV / HX	14ULY	46,000 lbs.	60 in.
WorkStar / HV / HX	14ULZ	46,000 lbs.	72 in.
WorkStar / HV / HX	14UMC	46,000 lbs.	55 in.

All applications must comply with applicable Hendrickson specifications and must also be approved by Navistar with the vehicle in its original, as-built configuration. All marks are trademarks of their respective owners.

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.

All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration.

Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Call Hendrickson at **630.910.2800** or **855.RIDERED (743.3733)** for additional information.



TRUCK COMMERCIAL VEHICLE SYSTEMS
 800 South Frontage Road
 Woodridge, IL 60517-4904 USA
 855.RIDERED (743.3733)
 630.910.2800 • Fax 630.910.2899

www.hendrickson-intl.com

45745-378 Rev C 02-20

© 2012 - 2020 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries, except for International and the International logo, which are owned by International Truck Intellectual Property Company, LLC or one of its affiliates. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.



www.internationaltrucks.com

Printed in United States of America