


SELF-STEER SUSPENSION MAINTENANCE

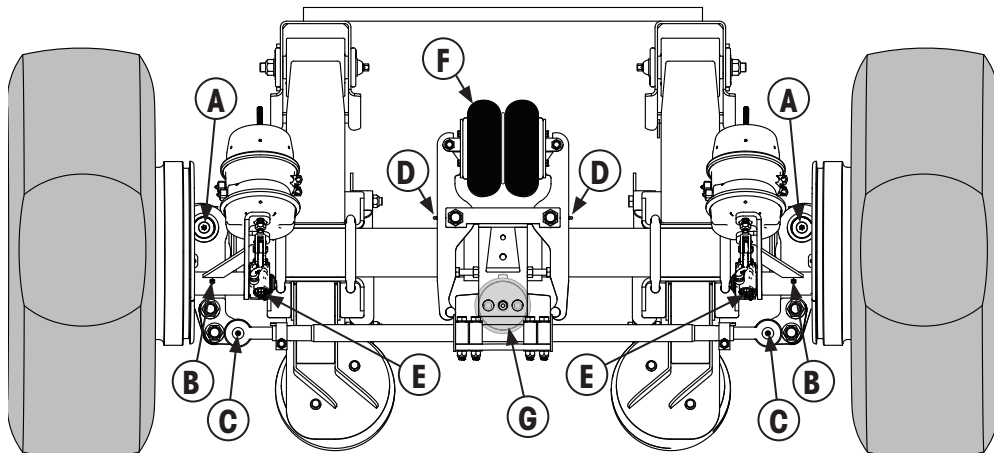

POINT	GREASE FITTING	LUBRICANT	FREQUENCY
A	Kingpin, top & bottom	NLGI #2 EP grease	Quarterly
B	Cam tube		Monthly
C	Tie rod end		
D	Lever arm pivot		
E	Slack adjuster	Vendor recommended	

POINT	INSPECT	ACTION	FREQUENCY
F	Lock straight actuator	Visually inspect	Quarterly
G	Lock straight chamber		

For more details, refer to Hendrickson literature L578 and T62001 available at www.Hendrickson-intl.com/TrailerLit

Trailer Commercial Vehicle Systems
2070 Industrial Place SE
Canton, OH 44707-2641 USA
866.RIDEAIR (743.3247)
330.489.0045 • FAX 800.696.4416



HENDRICKSON

www.hendrickson-intl.com

Hendrickson Canada
250 Chrysler Drive, Unit #3
Brampton, ON Canada L6S 6B6
800.668.5360
905.789.1030 • FAX 905.789.1033